



# Smart-UPS On-Line 230 V

Unity output power factor single-phase,  
double-conversion online UPS  
with advanced management features



[apc.com](http://apc.com)

Not for consumer use.

Life Is On

**APC**<sup>™</sup>  
by Schneider Electric



## A performance line of UPSs

APC Smart-UPS On-Line™ was developed to handle demanding power conditions, where uptime and efficiency is critical.

APC Smart-UPS On-Line is designed with performance in mind for our business customers. Smart-UPS On-Line is a performance line of UPSs developed to handle demanding power conditions, where uptime and efficiency is critical. Smart-UPS On-Line provides double-conversion online technology, advanced management features, and the reliability millions of IT professionals trust around the world. That's Certainty in a Connected World.

Smart-UPS On-Line is the ideal power protection for server rooms, network closets, edge computing, distributed IT and colocation environments, and is suitable for verticals ranging from healthcare, retail, finance to manufacturing and even industrial automation.

The Smart-UPS On-Line is capable of supporting loads from 1 kVA – 10 kVA in flexible rack/tower convertible chassis. When business critical systems require runtime in hours, not minutes, Smart-UPS On-Line can be configured with multiple battery packs to meet aggressive runtime demands. Ideal for unstaffed locations where remote, off-site management is key, the included PowerChute™ Network Shutdown software provides unattended graceful shutdown of network operating systems. Models 5 kVA to 10kVA include an integrated network management card making them EcoStruxure™ IT ready.





# Smart-UPS On-Line

Industry-leading power factor maximizing UPS density.  
Rackmount and tower SRT 2.2 1 kVA – 10 kVA

## Standard features

**Best-in-class power density**  
More real power in watts, 0.9 pf on 2.2 kVA–5 kVA,  
Unity on 6 kVA – 10 kVA units.

**High-efficiency “green mode”**  
Achieves 98 percent efficiency, which saves  
utility and cooling costs without compromising  
performance or reliability.

**Graphical LCD display with multicolor backlight**  
Intuitive interface provides detailed and accurate  
information with ability to configure locally.

**Intelligent battery management**  
Temperature-compensated charging extends life  
and advanced algorithms recommend replacement  
date. The UPS can inform user which batteries need  
to be replaced and auto detect when additional  
battery packs are added.

**Built-in energy meter**  
Measures energy use and displays  
UPS efficiency in various modes of operation  
for easy energy tracking.

**Operate without battery**  
Ability to immediately protect equipment  
when power returns after a complete discharge  
of the battery.

**Three-year warranty on electronics**  
Additional year of warranty protection  
for electronics provides peace of mind.



SRT6KXLI



# Smart-UPS On-Line

Proven performance with the world's largest installed base of single-phase, double-conversion products. Rackmount and tower SRT 1 kVA to 10 kVA

## Additional features

### Embedded network management card with environmental monitoring (5 kVA – 10 kVA models)

Remote monitoring and control of the UPS and the environment via Ethernet connection while freeing up the SmartSlot™ so customers can add accessories for additional communication options.

### Switched outlet group(s)

Ability to control a group of output load receptacles independent from the main UPS. Enables:

- Rebooting hung device without cycling the entire UPS
- Sequenced turn ON/OFF
- Shedding of noncritical loads based on a variety of parameters (battery time, runtime remaining, and overload)
- Scheduled time OFF to conserve energy

### Emergency power off

Remote UPS shutoff in the event of a fire or other emergency. The UPS can accept normally open (NO) or normally closed (NC) contacts.

### Communication ports

Serial, USB, Ethernet, and SmartSlot for network accessory cards.

### Communication protocols


Modbus serial, USB PowerSummary, HTTP, SNMP, and Telnet.

### 1:1, 3:1 input hard-wire options

Product can be wired for 3-PH or 1-PH input (230 V, 8 kVA, and 10 kVA models only).

### Dual input

Enables second input source to be connected to UPS bypass (230 V, 8 kVA, and 10 kVA models only).

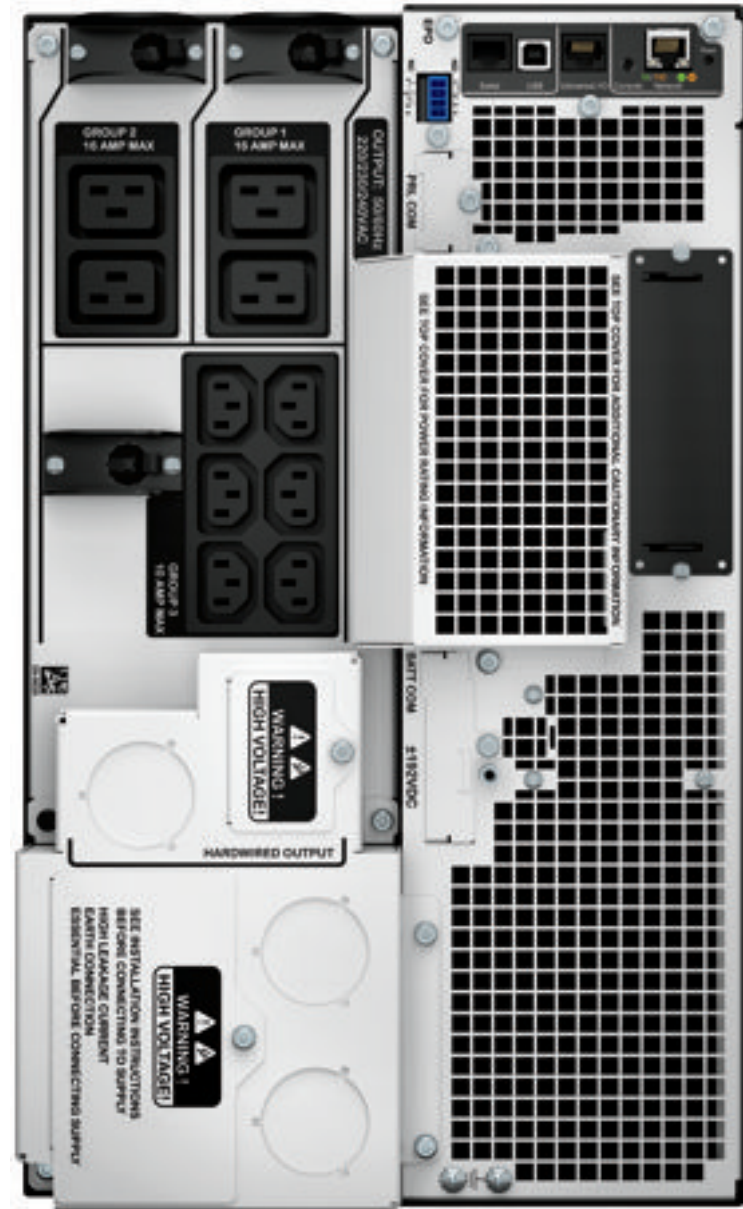

SRT10KXLT

# Smart-UPS On-Line display

Intuitive, easy-to-use LCD provides clear and accurate information in multiple languages.

## Standard features

### LCD display screen

Accurately provides real-time status updates in your choice of basic or advanced menus.

### UPS status (scrolling)

- Output voltage
- Input voltage
- Output frequency
- Runtime
- Load
- Battery health

### Control

- UPS and outlet group settings
- Bypass control

### Configuration

- Output voltage, frequency
- Language, brightness, contrast
- Alarm volume
- IP address

### Test and diagnostics

- Initiate battery and runtime calibration tests

### About

- UPS serial number, battery part number
- Battery install and suggested replacement dates



### Backlit screens:

**Amber:** Indication of condition that requires attention

**Red:** Indication of UPS alarm that requires immediate attention

# Product accessories

## Management cards

- **AP9630:** UPS network management card with PowerChute network shutdown
- **AP9631:** UPS network management card with PowerChute network shutdown and environmental monitoring
- **AP9335TH:** APC™ by Schneider Electric temperature and humidity sensor
- **AP9810:** APC dry contact I/O accessory
- **AP9624:** UPS interface expander
- **AP9613:** Dry contact I/O SmartSlot card

## Rail kits

- **SRTRK2:** APC Smart-UPS SRT 19 inch rail kit for Smart-UPS SRT 5/6/8/10 kVA UPS
- **SRTRK3:** APC 2-post mounting rail kit for Smart-UPS SRT 2.2/3/5/6/8/10 kVA UPS
- **SRTRK4:** APC Smart-UPS SRT 19 in rail kit for Smart-UPS SRT 2.2/3 kVA UPS



Management card

## Backplate kit

- **SRT001:** APC Smart-UPS SRT 5 kVA output HW kit
- **SRT012:** APC Smart-UPS SRT 2.2/3 kVA input/output HW kit



Battery pack

## Battery packs

- **SRT192BP:** APC Smart-UPS SRT 192 V 5 kVA and 6 kVA battery pack
- **SRT192RMBP:** APC Smart-UPS SRT 192 V 5 kVA and 6 kVA RM battery pack
- **SRT192BP2:** APC Smart-UPS SRT 192 V 8 kVA and 10 kVA battery pack
- **SRT192RMBP2:** APC Smart-UPS SRT 192 V 8 kVA and 10 kVA RM battery pack
- **SRT72BP:** APC Smart-UPS SRT 72 V 2.2 kVA battery pack
- **SRT72RMBP:** APC Smart-UPS SRT 72 V 2.2 kVA RM battery pack
- **SRT96BP:** APC Smart-UPS SRT 96 V 3 kVA battery pack
- **SRT96RMBP:** APC Smart-UPS SRT 96 V 3 kVA RM battery pack
- **SRT002:** APC Smart-UPS SRT 5 M extension cable for 192 VDC External Battery Packs 5/6 kVA UPS
- **SRT003:** APC Smart-UPS SRT 5 M extension cable for 192 VDC External Battery Packs 8/10 kVA UPS
- **SRT009:** APC Smart-UPS SRT 5 M extension cable for 72 VDC external battery pack 2.2 kVA UPS
- **SRT010:** APC Smart-UPS SRT 5 M extension cable for 96 VDC external battery pack 3 kVA UPS

## Transformers

- **SURT001:** APC Smart-UPS RT 3,000 VA 230 V
- **SURT002:** APC Smart-UPS RT 5,000 VA 230 V isolation transformer
- **APTF10K W01:** APC W W 10 kVA isolation transformer



Rail kits

## Service bypass panels

- **SBP6KRM12U:** APC service bypass panel 230 V; 50 A; MBB; hardwire input; (4) IEC-320 C19 output
- **SBP10KRM14U:** APC service bypass panel 230 V; 100 A; MBB; hardwire input; IEC-320 output (8) C13 (2) C19

## Other

**SURT013:** SURT Equipment Cart

**APCRBC140:** RBC for SRT 5 kVA - 10 kVA UPS

**APCRBC141:** RBC for SRT 2.2 kVA UPS

**APCRBC152:** RBC for SRT 3 kVA UPS

## Runtime estimates at half and full load (minutes)

UPS half/full loads	SRT2200XLI (RM) (RM-NC) (990 W/1,980 W)	SRT3000XLI (RM) (RM-NC) SRT3000XLW-IEC (RM) (1,350 W/2,700 W)	SRT5KXLI (RM) SRT5KRMXLW-HW (2,250 W/4,500 W)	SRT6KXLI (RM) (3,000 W/6,000 W)	SRT8KXLI (RM) (4,000 W/8,000 W)	SRT10KXLI (RM) (5,000 W/10,000 W)
Internal	11.6/3.9	11.8/4.0	11.8/4	8.7/2.5	14.5/5.2	11.5/3.8
(1) Battery pack	45.7/20.2	46.4/20.5	46.2/20.5	36/15.5	34.5/14.7	28/11.6
(2) Battery packs	82.1/37.6	83.3/38.1	83/38	65.2/29.4	55.43/24.63	45.3/19.8
(3) Battery packs	119.9/55.6	121.6/56.3	121/56.4	95.5/43.8	77/34.84	63.1/28.2
(4) Battery packs	158.6/74.1	160.9/75.1	160.4/75.1	126.6/58.6	99.1/45.33	81.3/36.8

# Smart-UPS On-Line SRT

## 1 & 1.5 kVA technical specifications

UPS Model	SRT1000XLI	SRT1000RMXLI	SRT1000RMXLI-NC	SRT1500XLI	SRT1500RMXLI	SRT1500RMXLI-NC
<b>Output</b>						
Power Capacity	1000 VA / 1000 W	1000 VA / 1000 W	1000 VA / 1000 W	1500 VA / 1500 W	1500 VA / 1500 W	1500 VA / 1500 W
Nominal Output Voltage	220, 230, 240 V					
Output Frequency	50/60 Hz +/- 3 Hz (autosense) 50/60 Hz +/- 0.1Hz (user selectable)					
Efficiency online at full load	91%			92%		
Efficiency in green mode	94%			96%		
Topology and output waveform	Double conversion online					
Output Connections	(6) IEC 320 C13					
Switched outlet groups	2					
<b>Input</b>						
Nominal Input Voltage	220, 230, 240 V					
Input Voltage range at full load (40% load)	176 – 275 VAC 100 – 275 VAC					
Input Frequency	40 – 70 Hz (auto sensing)					
Input Connection	IEC-60320 C14					
<b>Batteries</b>						
Battery type	Maintenance-free sealed lead-acid battery with suspended electrolyte, leak proof					
Replacement battery cartridge	APCRBC155					
Extended Run Battery Module	SRT48BP	SRT48RMBP	SRT48RMBP	SRT48RMBP	SRT48RMBP	SRT48RMBP
Runtime Estimates at half and full load, min	500 W / 1000 W	500 W / 1000 W	500 W / 1000 W	750 W / 1500 W	750 W / 1500 W	750 W / 1500 W
Internal battery only	21.5 / 8.4	21.5 / 8.4	21.5 / 8.4	14.6 / 4.0	14.6 / 4.0	14.6 / 4.0
1 x External Battery Pack	90.0 / 40.0	90.0 / 40.0	90.0 / 40.0	63.0 / 27.0	63.0 / 27.0	63.0 / 27.0
2 x External Battery Pack	134.0 / 63.0	134.0 / 63.0	134.0 / 63.0	95.1 / 45.0	95.1 / 45.0	95.1 / 45.0
3 x External Battery Pack	194.0 / 92.0	194.0 / 92.0	194.0 / 92.0	138.7 / 66.3	138.7 / 66.3	138.7 / 66.3
4 x External Battery Pack	257.0 / 122.0	257.0 / 122.0	257.0 / 122.0	183.4 / 88.2	183.4 / 88.2	183.4 / 88.2
<b>Communication and management</b>						
Interface ports	RJ-45 Serial, SmartSlot, USB					
Control panel and audible alarms	Multi-function LCD status and control console, Audible and visible alarms prioritized by severity					
Emergency power off (EPO)	Yes (NO/NC connections)					
<b>Physical</b>						
Rack height	N/A	2U	2U	N/A	2U	2U
Maximum height	3.35 inches (85 mm)	3.35 inches (85 mm)	3.35 inches (85 mm)	3.35 inches (85 mm)	3.35 inches (85 mm)	3.35 inches (85 mm)
Maximum width	17.0 inches (432 mm)	17.0 inches (432 mm)	17.0 inches (432 mm)	17.0 inches (432 mm)	17.0 inches (432 mm)	17.0 inches (432 mm)
Maximum depth	20.0 inches (505 mm)	20.0 inches (505 mm)	20.0 inches (505 mm)	20.0 inches (505 mm)	20.0 inches (505 mm)	20.0 inches (505 mm)
Net weight (Excluding packaging)	22.0 kg	22.0 kg	22.0 kg	22.0 kg	22.0 kg	22.0 kg
Weight with packaging	26.9 kg	26.9 kg	26.9 kg	26.9 kg	26.9 kg	26.9 kg
<b>Conformance</b>						
Regulatory	CE, CE Mark, EN/IEC 62040-1, EN/IEC 62040-2, EAC, RCM, VDE					
Warranty	Three years repair or replace (excluding battery) and two years for battery					

# Smart-UPS On-Line SRT

## 2200 VA and SRT 3000 VA technical specifications

Product feature	SRT2200XLI SRT2200RMXLI SRT2200RMXLI-NC (Pre-installed NMC, AP9631)	SRT3000XLI SRT3000RMXLI SRT3000RMXLI-NC (Pre-installed NMC, AP9631)	SRT3000XLW-IEC SRT3000RMXLW-IEC
<b>Output</b>			
Power rating	2200 VA / 1980 W	3000 VA / 2700 W	
Nominal output voltage	230 V (220 V, 240 V user selectable)		230 V (208 V, 220 V, 240 V user selectable)
Output frequency	50/60 Hz ± 3 Hz (auto sense) 50/60 Hz ± 0.1 Hz (user selectable)		
Topology	Double-conversion online		
Online efficiency at full load (typical)	92%		
Green mode efficiency at full load (typical)	96%	97%	
Output connections (switched groups)	(8) IEC 320 C13, (2) IEC 320 C19		(4) IEC320 C13, (2) IEC320 C19
<b>Input</b>			
Nominal input voltage	230 V		230 V (208 V, 220 V, 240 V user selectable)
Input voltage range full load (half load)	160 – 275 V (100 – 275 V)		
Input frequency	40 – 70 Hz auto-selecting		
Input connection	IEC-60320 C20		
<b>Batteries and runtime</b>			
Battery type	Maintenance-free sealed lead-acid battery with suspended electrolyte, leak proof		
Typical backup time at ½ load (min)	11.6 min	11.8 min	
Typical backup time at full load (min)	3.9 min	4.0 min	
Replacement battery (quantity)	APCRBC141 (1)	APCRBC152 (1)	
External battery pack (tower/rack mount)	SRT72BP / SRT72RMBP	SRT96BP / SRT96RMBP	
<b>Communication and management</b>			
Interface ports	Serial (RJ45), USB (Type A) and SmartSlot		
Control panel	High-resolution graphical LCD display		
Emergency power off (EPO)	Yes (NO/NC connections)		
<b>Physical</b>			
Rack height	85 mm, 2U		
Maximum width (RM)	432 mm	432 mm	
Maximum depth (RM)	585 mm	636 mm	
Net weight	25 Kg	31 kg	
<b>Conformance</b>			
Regulatory	CE, VDE, RCM, and EAC, IEC/EN 62040-1, IEC/EN 62040-2	CE, VDE, RCM, and EAC, IEC/EN 62040-1, IEC/EN 62040-2, UL-1778, FCC Part 15 Class A, CSA	
Warranty	Three years for electronics/two years for battery		

# Smart-UPS On-Line SRT

## 5 kVA – 10 kVA technical specifications

Product feature	SRT5KRMXLW-HW	SRT5KXLI SRT5KRMXLI	SRT6KXLI SRT6KRMXLI	SRT8KXLI SRT8KRMXLI	SRT10KXLI SRT10KRMXLI
<b>Output</b>					
Power rating	5,000 VA / 4,500 W		6,000 VA / 6,000 W	8,000 VA / 8,000 W	10,000 VA / 10,000 W
Nominal output voltage	230 V (220 V, 240 V, 208 V user selectable)		230 V (220 V, 240 V user selectable)		
Output frequency	50/60 Hz ± 3 Hz (auto sense)		50/60 Hz ± 0.1 Hz (user selectable)		
Topology	Double-conversion online				
Online efficiency at full load (typical)	94%				
Green mode efficiency at full load (typical)	98%				
Output connections (switched groups)	Hardwire three-wire (1 PH + N + G) or (2 PH + G)	(6) IEC 320 C13 (4) IEC 320 C19	(6) IEC320 C13, (4) IEC320 C19, hardwire three-wire (1 PH + N + G)		
<b>Input</b>					
Nominal input voltage	208 V, 220 V, 230 V, 240 V	220 V, 230 V, 240 V		220 V / 380 V, 230 V / 400 V, 240 V / 415 V	
Input voltage range full load (half load)	160 – 275 V (100 – 275 V)			160/277 – 275/476 V (100/173-275 / 476 V)	
Input frequency	40 – 70 Hz auto-selecting				
Input connection	Hardwire three-wire (1 Ph+N+G) or (2 PH + G)	Hardwire three-wire (1 Ph+N+G)		Hardwire three-wire (1 Ph+N+G), Hardwire five-wire (3 Ph+N+G)	
<b>Batteries and runtime</b>					
Battery type	Maintenance-free sealed lead-acid battery with suspended electrolyte, leak proof				
Typical backup time at ½ load (min)	11.8 min.		8.7 min.	14.5 min.	11.5 min.
Typical backup time at full load (min)	4 min.		2.5 min.	5.2 min.	3.8 min.
Replacement battery (quantity)	APCRBC140 (1)			APCRBC140 (2)	
External battery pack (tower/rack mount)	SRT192BP / SRT192RMBP			SRT192BP2 / SRT192RMBP2	
<b>Communication and management</b>					
Interface ports	Embedded network management with environmental monitoring, which includes an RJ-45 with status LEDs (10/100 Base-T).				
Control panel	High-resolution graphical LCD display				
Emergency power off (EPO)	Yes (normally open, NO/ normally closed, NC connections)				
<b>Physical</b>					
Rack height	3 U		4 U	6 U	6 U
Maximum height (RM)	130 mm		174 mm	263 mm	263 mm
Maximum width (RM)	432 mm		432 mm	432 mm	432 mm
Maximum depth (RM)	719 mm		719 mm	715 mm	715 mm
Net weight	54.5 kg		60 kg	112 kg	112 kg
<b>Conformance</b>					
Regulatory	UL-1778, FCC Part 15 Class A, CSA, CE, VDE, RCM, and EAC, IEC/EN 62040-1, IEC/EN 62040-2		CE, VDE, RCM, and EAC, IEC/EN 62040-1, IEC/EN 62040-2		
Warranty	Three years for electronics / two years for battery				

Life Is On

**APC**<sup>™</sup>

by **Schneider** Electric

Schneider Electric

132 Fairgrounds Rd.  
West Kingston, RI 02892  
United States

[www.apc.com](http://www.apc.com)